

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0136  
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU3405
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC. Contact: MARY A. MAESTAS E-Mail: mary_maestas@eogresources.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078		8. Lease Name and Well No. WILD HORSE FEDERAL 126-35
3b. Phone No. (include area code) Ph: 303-824-5526		9. API Well No. 43-047-40308
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NWNW 1186FNL 795FWL 39.90760 N Lat, 109.75591 W Lon At proposed prod. zone NWNW 1186FNL 795FWL 39.90760 N Lat, 109.75591 W Lon		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 53.9 MILES SOUTH OF VERNAL, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 35 T10S R19E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 795' PROPERTY LINE, 134' DRILLING UNIT LINE	16. No. of Acres in Lease 1600.00	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 2380'	19. Proposed Depth 10160 MD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5309 GL	22. Approximate date work will start	17. Spacing Unit dedicated to this well 40.00
		20. BLM/BIA Bond No. on file NM2308
		23. Estimated duration 45 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission) 	Name (Printed/Typed) MARY A. MAESTAS Ph: 303-824-5526	Date 08/05/2008
Title REGULATORY ASSISTANT		
Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL	Date 11-18-08
Title Office ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #62000 verified by the BLM Well Information System  
For EOG RESOURCES, INC., sent to the Vernal

Federal Approval of this  
Action is Necessary


\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\*

RECEIVED  
AUG 07 2008  
DIV. OF OIL, GAS & MINING

606401X  
4418026Y  
39.907533  
- 109.755229

T10S, R19E, S.L.B.&M.

1956 Brass Cap,  
Pile of Stones,  
0.8' High, E-W  
Fenceline

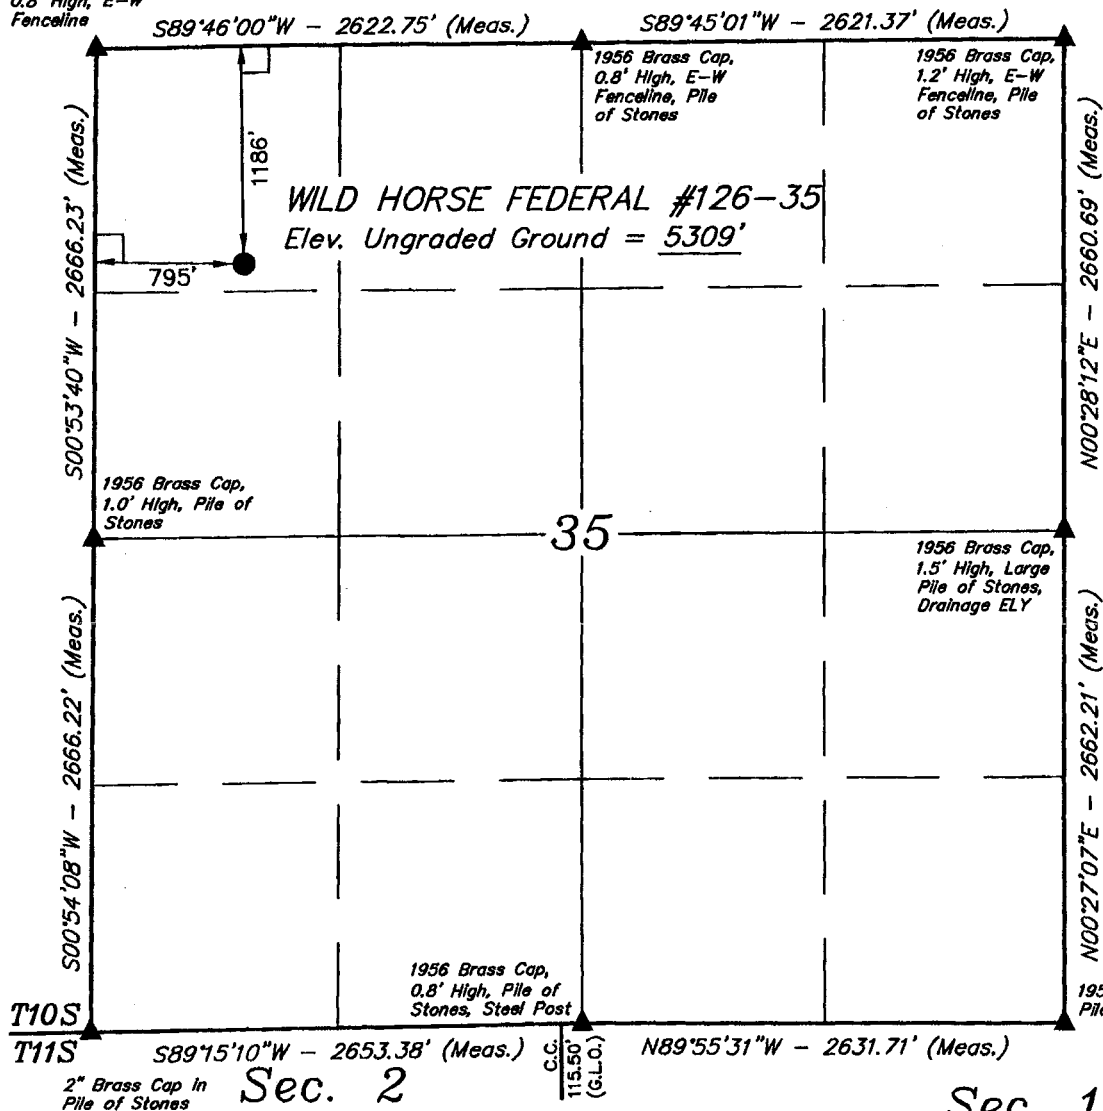

EOG RESOURCES, INC.


Well location, WILD HORSE FEDERAL #126-35,  
located as shown in the NW 1/4 NW 1/4 of  
Section 35, T10S, R19E, S.L.B.&M., Uintah  
County, Utah.

### BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION  
20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN.  
NW QUADRANGLE, UTAH, UINTAH COUNTY 7.5 MINUTE QUAD.  
(TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES  
DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID  
ELEVATION IS MARKED AS BEING 5251 FEET.


### BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

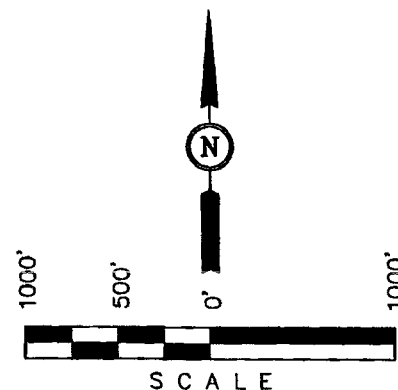

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE MAP WAS PREPARED FROM  
FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY  
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE  
BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-23-07	DATE DRAWN: 05-30-07
PARTY A.F. R.M. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

STATE OF COLORADO )

) ss

COUNTY OF DENVER )

VERIFICATION

Mary A. Maestas, of lawful age, being first duly sworn upon oath, deposes and says:

She is a Regulatory Assistant of EOG Resources, Inc., of Denver, Colorado. EOG Resources, Inc. is the operator of the following described well:


**Wild Horse Federal 126-35  
1186' FNL – 795' FWL (NWNW)  
SECTION 35, T10S, R19E  
UINTAH COUNTY, UTAH**

EOG Resources, Inc., and XTO Energy, Exhibit A, are the only owners in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 5<sup>th</sup> day of August, 2008 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.


Said envelope, which contained these instruments, was addressed to the Utah Division of Oil, Gas & Mining, Bureau of Land Management, and XTO Energy.

Further affiant saith not.

  
\_\_\_\_\_  
Mary A. Maestas  
Regulatory Assistant

Subscribed and sworn before me this 5<sup>th</sup> day of August, 2008.

My Commission Expires: 8/31/2011

  
\_\_\_\_\_  
Notary Public




Exhibit "A" to Affidavit  
Wild Horse Federal 126-35 Application to Commingle

XTO Energy  
810 Houston Street  
Fort Worth, Texas 76012-6298  
Attn: Mr. Mick Dow



R 19 E



○ Wild Horse Federal 126-35

Scale: 1"=1000'  
0 1/4 1/2 Mile



Denver Division

EXHIBIT "A"

Wild Horse Federal 126-35  
Commingle Application  
Uintah County, Utah

Scale: 1"=1000'	D:\utah\Commingle\1 page_WHF 127-35_commingle.dwg WELL	Author	Aug 04, 2006 - 2:22pm
-----------------	---	--------	-----------------------

TLM

## DRILLING PLAN

**WILD HORSE FEDERAL 126-35**  
**NW/NW, SEC. 35, T10S, R19E, S.L.B.&M..**  
**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	995		Shale	
Mahogany Oil Shale Bed	1,646		Shale	
Wasatch	4,332	Primary	Sandstone	Gas
Chapita Wells	4,927	Primary	Sandstone	Gas
Buck Canyon	5,649	Primary	Sandstone	Gas
North Horn	6,530	Primary	Sandstone	Gas
KMV Price River	7,913	Primary	Sandstone	Gas
KMV Price River Middle	8,685	Primary	Sandstone	Gas
KMV Price River Lower	9,537	Primary	Sandstone	Gas
Sego	9,953		Sandstone	
TD	10,160			

**Estimated TD: 10,160' or 200'± TD**

**Anticipated BHP: 5,547 Psig**

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch and Mesaverde formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from cased-hole logs. Production from the Wasatch and Mesaverde formations will be commingled in the wellbore and produced through open-ended 2-3/8" tubing landed below all perforations in the 4-1/2" production casing.

Attached is a map showing the location of all wells on contiguous oil and gas leases or drilling units and an affidavit showing that this application has been provided to owners of all contiguous oil and gas leases or drilling units overlying the pool.

**3. PRESSURE CONTROL EQUIPMENT:**

Production Hole – 5000 Psig  
BOP schematic diagrams attached.

## DRILLING PLAN

### WILD HORSE FEDERAL 126-35 NW/NW, SEC. 35, T10S, R19E, S.L.B.&M.. UINTAH COUNTY, UTAH

#### **4. CASING PROGRAM:**

<u>CASING</u>	<u>Hole Size</u>	<u>Length</u>	<u>Size</u>	<u>WEIGHT</u>	<u>Grade</u>	<u>Thread</u>	<u>Rating Collapse</u>	<u>Factor Burst</u>	<u>Tensile</u>
Conductor	17 1/2"	0 – 45'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 1/4"	0 – 2,300' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	Surface – TD	4-1/2"	11.6#	P-110	LTC	7560 PSI	10,690 Psi	279,000#

**Note:** 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

#### **5. Float Equipment:**

##### **Surface Hole Procedure (0' - 2300'±)**

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5<sup>th</sup> joint to surface. (15 total)

##### **Production Hole Procedure (2300'± - TD):**

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2<sup>nd</sup> joint.

#### **6. MUD PROGRAM**

##### **Surface Hole Procedure (Surface - 2300'±):**

Air/air mist or aerated water.

##### **Production Hole Procedure (2300'± - TD):**

Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

## **DRILLING PLAN**

### **WILD HORSE FEDERAL 126-35** **NW/NW, SEC. 35, T10S, R19E, S.L.B.&M..** **UINTAH COUNTY, UTAH**

**2300'± - TD** A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

## **7. VARIANCE REQUESTS:**

**Reference:** Onshore Oil and Gas Order No. 1  
Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

- EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
- EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

## **8. EVALUATION PROGRAM:**

**Logs:** Mud log from base of surface casing to TD.  
**Cased-hole Logs:** Cased-hole logs will be run in lieu of open-hole logs consisting of the following:  
**Cement Bond / Casing Collar Locator and Pulsed Neutron**

## **9. CEMENT PROGRAM:**

**Surface Hole Procedure (Surface - 2300'±):**

## DRILLING PLAN

### WILD HORSE FEDERAL 126-35 NW/NW, SEC. 35, T10S, R19E, S.L.B.&M.. UINTAH COUNTY, UTAH

**Lead:**            **185 sks**            Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl<sub>2</sub>, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft<sup>3</sup>/sk. yield, 23 gps water.

**Tail:**            **207 sks**            Class "G" cement with 2% CaCl<sub>2</sub>, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft<sup>3</sup>/sk., 5.2 gps water.

**Top Out:**                            As necessary with Class "G" cement with 2% CaCl<sub>2</sub>, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft<sup>3</sup>/sk., 5.2 gps water.

**Note:**                                Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

#### Production Hole Procedure (2300'± - TD)

**Lead:**            **112 sks:**            Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft<sup>3</sup>/sk., 24.5 gps water.

**Tail:**            **1117 sks:**            50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft<sup>3</sup>/sk., 5.9gps water.

**Note:**                                The above number of sacks is based on gauge-hole calculation.  
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.  
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

**Final Cement volumes will be based upon gauge-hole plus 45% excess.**

## **10. ABNORMAL CONDITIONS:**

### **Surface Hole (Surface - 2300'±):**

Lost circulation

### **Production Hole (2300'± - TD):**

## **DRILLING PLAN**

### **WILD HORSE FEDERAL 126-35** **NW/NW, SEC. 35, T10S, R19E, S.L.B.&M..** **UINTAH COUNTY, UTAH**

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

#### **11. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

#### **12. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


#### **13. AIR DRILLING OPERATIONS:**

- Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
- Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
- The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
- Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
- EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

**(Attachment: BOP Schematic Diagram)**


**EOG RESOURCES 11" 5,000 PSI W.P. BOP CONFIGURATION**

PAGE 1 OF 2

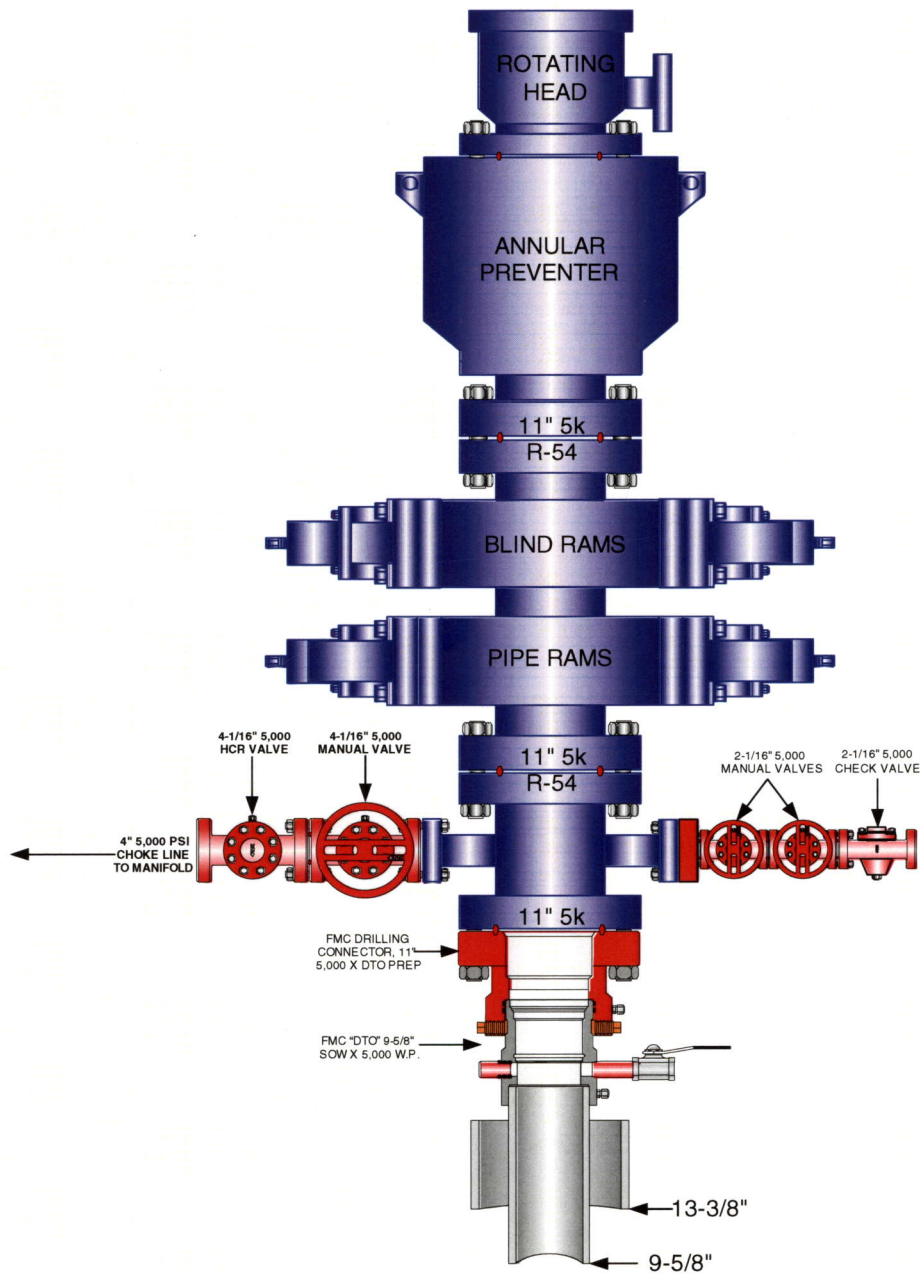

## EOG RESOURCES CHOKE MANIFOLD CONFIGURATION W/ 5,000 PSI WP VALVES

PAGE 2 OF 2

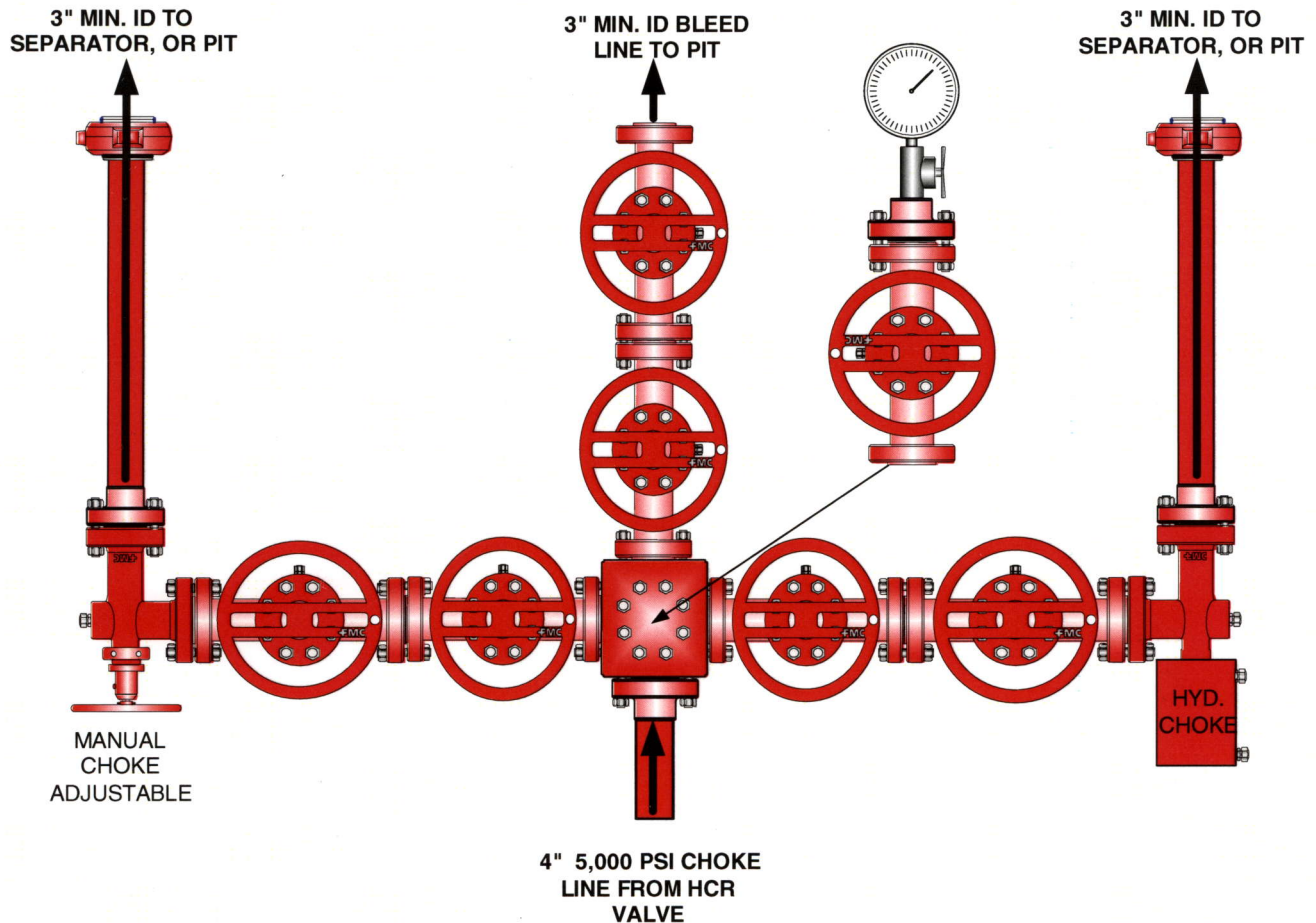

### Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.  
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.





***Wild Horse Federal 126-35  
NWNW, Section 35, T10S, R19E  
Uintah County, Utah***

***SURFACE USE PLAN***

**The well pad is approximately 375 feet long with a 246-foot width, containing 2.12 acres more or less. New surface disturbance associated with the well pad is estimated to be 2.12 acres.**

***1. EXISTING ROADS:***

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 53.9 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

***2. PLANNED ACCESS ROAD:***

- A. The existing access road for the Wild Horse Federal 2-35 will be used to access the proposed location. No new road will be required.
- B. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

Traveling off the 40-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

***3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:***

See attached TOPO map "C" for the location of wells within a one-mile radius.

**4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:**

**A. On Well Pad**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and attaching piping.
2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.

**B. Off Well Pad**

1. No new off-pad pipeline will be required. The existing pipeline for the Wild Horse Federal 2-35 well will be used to transport gas from the proposed location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon or Covert Green.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

**5. LOCATION AND TYPE OF WATER SUPPLY:**

- A. Water supply will be Bonanza Power Plant water source in Sec 26, T8S, R23E, Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

**6. SOURCE OF CONSTRUCTION MATERIALS:**

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

**7. METHODS OF HANDLING WASTE DISPOSAL:**

**A. METHODS AND LOCATION**

1. Cuttings will be confined in the reserve pit.
2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.

3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
  4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD, CWU 2-29 SWD, Red Wash Evaporation ponds 1, 2, 3 or 4 or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
  5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit, through natural or artificial methods, or removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with double felt, and a 20-millimeter plastic liner. Sufficient bedding (i.e. weed free straw, or hay; felt; polyswell or soil) will be used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold

planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

**8. ANCILLARY FACILITIES:**

None anticipated.

**9. WELL SITE LAYOUT:**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the southeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the south side of the location, a minimum of 100 feet from the wellhead and 30 feet from the reserve pit fence.

The existing topsoil pile will be relocated further west from its present location and preserved for reclamation purposes. The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the west.

**The corners of the well pad will be rounded off as needed to minimize excavation.**

**FENCING REQUIREMENTS:**

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.

- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

#### **10. PLANS FOR RECLAMATION OF THE SURFACE:**

##### **A. Interim Reclamation (Producing Location)**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of the well completion, or as soon as environmental conditions allow. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

<b>Seed Mixture</b>	<b>Drilled Rate (lbs./acre PLS*)</b>
HyCrest Wheatgrass	5.0
Shadscale	4.0
Prostrate Kochia	3.0

\*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

***B. Dry Hole/Abandoned Location***

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

<b>Seed Mixture</b>	<b>Drilled Rate (lbs./acre PLS*)</b>
Fourwing Saltbush	4.0
Shadscale	4.0
Indian Ricegrass	3.0
HyCrest Wheatgrass	1.0

\*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

**11. SURFACE OWNERSHIP:**

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

**Bureau of Land Management**

**12. OTHER INFORMATION:**

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.

- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and submitted by Montgomery Archaeological Consultants on 8/22/2007. A paleontological survey was conducted and submitted by Intermountain Paleo on 8/14/2007.

**Additional Surface Stipulations:**

None.



***LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:***

**PERMITTING AGENT**

Mary A. Maestas  
EOG Resources, Inc.  
1060 East Highway 40  
Vernal, UT 84078  
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

The operator or his/her contractor shall contact the BLM office at (435) 781-4400 forty-eight (48) hours prior to construction activities.

**CERTIFICATION:**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Wild Horse Federal 126-35 Well, located in the NWNW, of Section 35, T10S, R19E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

August 5, 2008

Date

  
\_\_\_\_\_  
Mary A. Maestas, Regulatory Assistant

Date of onsite: July 8, 2008

# EOG RESOURCES, INC.

WHF #126-35

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 35, T10S, R19E, S.L.B.&M.

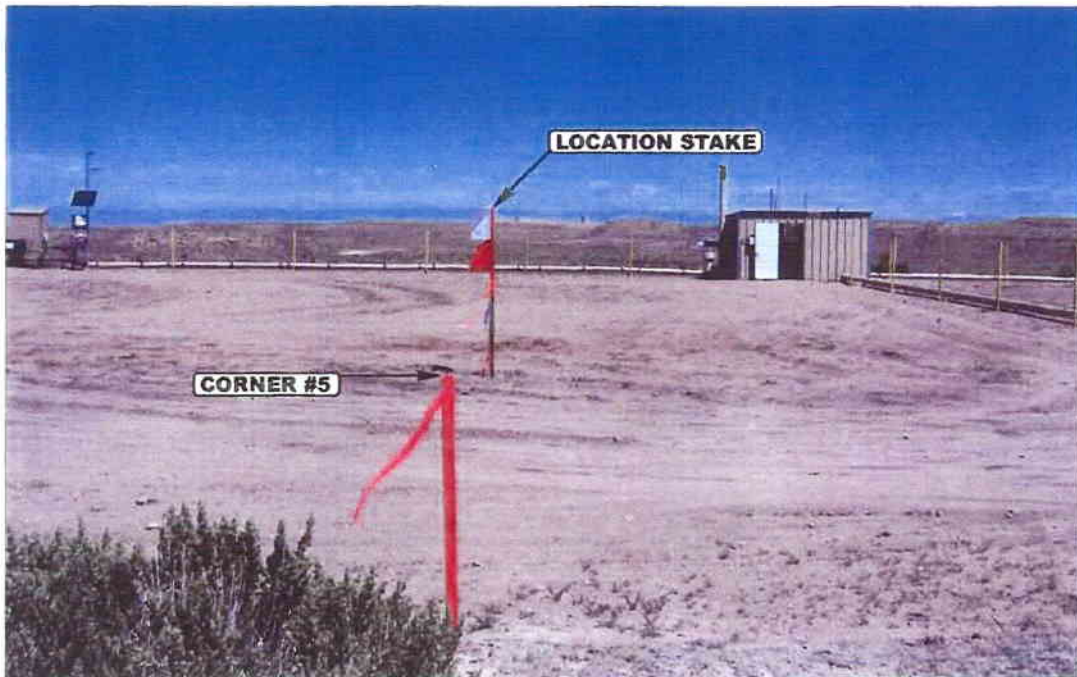


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW OF EXISTING ACCESS

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

05 29 07  
MONTH DAY YEAR

PHOTO

TAKEN BY: A.F.

DRAWN BY: A.A.

REVISED: 00-00-00

EOG RESOURCES, INC.  
WHF #126-35  
SECTION 35, T10S, R19E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN LEFT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 1.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THENORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 53.9 MILES.

**UINTAH ENGINEERING & LAND SURVEYING**  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

# EOG RESOURCES, INC.

## TYPICAL CROSS SECTIONS FOR



WILD HORSE FEDERAL #126-35  
SECTION 35, T10S, R19E, S.L.B.&M.  
1186' FNL 795' FWL

FIGURE #2

X-Section  
Scale  
1" = 50'

DATE: 06-01-07

Drawn By: C.H.

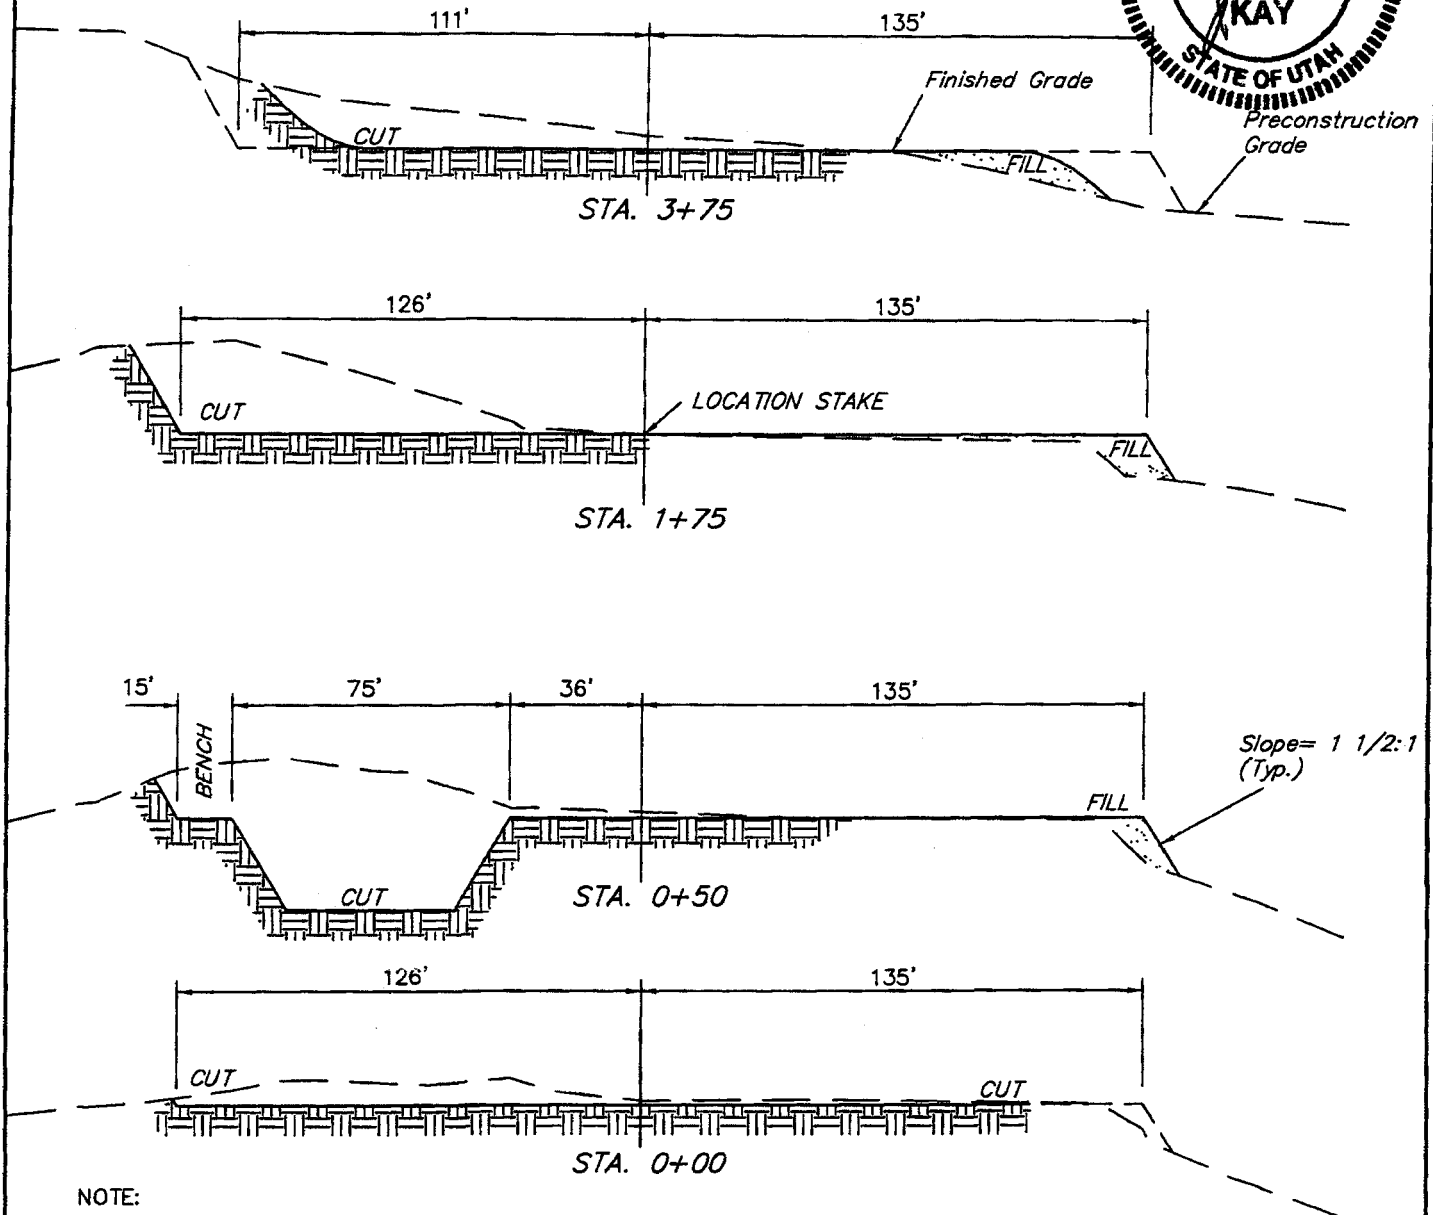

### NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

### \* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

### APPROXIMATE YARDAGES

(6") Topsoil Stripping = 880 Cu. Yds.  
Remaining Location = 11,430 Cu. Yds.  
TOTAL CUT = 12,310 CU.YDS.  
FILL = 1,590 CU.YDS.

EXCESS MATERIAL = 10,720 Cu. Yds.  
Topsoil & Pit Backfill = 2,670 Cu. Yds.  
(1/2 Pit Vol.)  
EXCESS UNBALANCE = 8,050 Cu. Yds.  
(After Interim Rehabilitation)

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017



EOG RESOURCES, INC.  
PRODUCTION FACILITY LAYOUT FOR  
WILD HORSE FEDERAL #126-35  
SECTION 35, T10S, R19E, S.L.B.&M.  
1186' FNL 795' FWL

FIGURE #3




SCALE: 1" = 50'  
DATE: 06-01-07  
Drawn By: C.H.

Existing Access  
Road

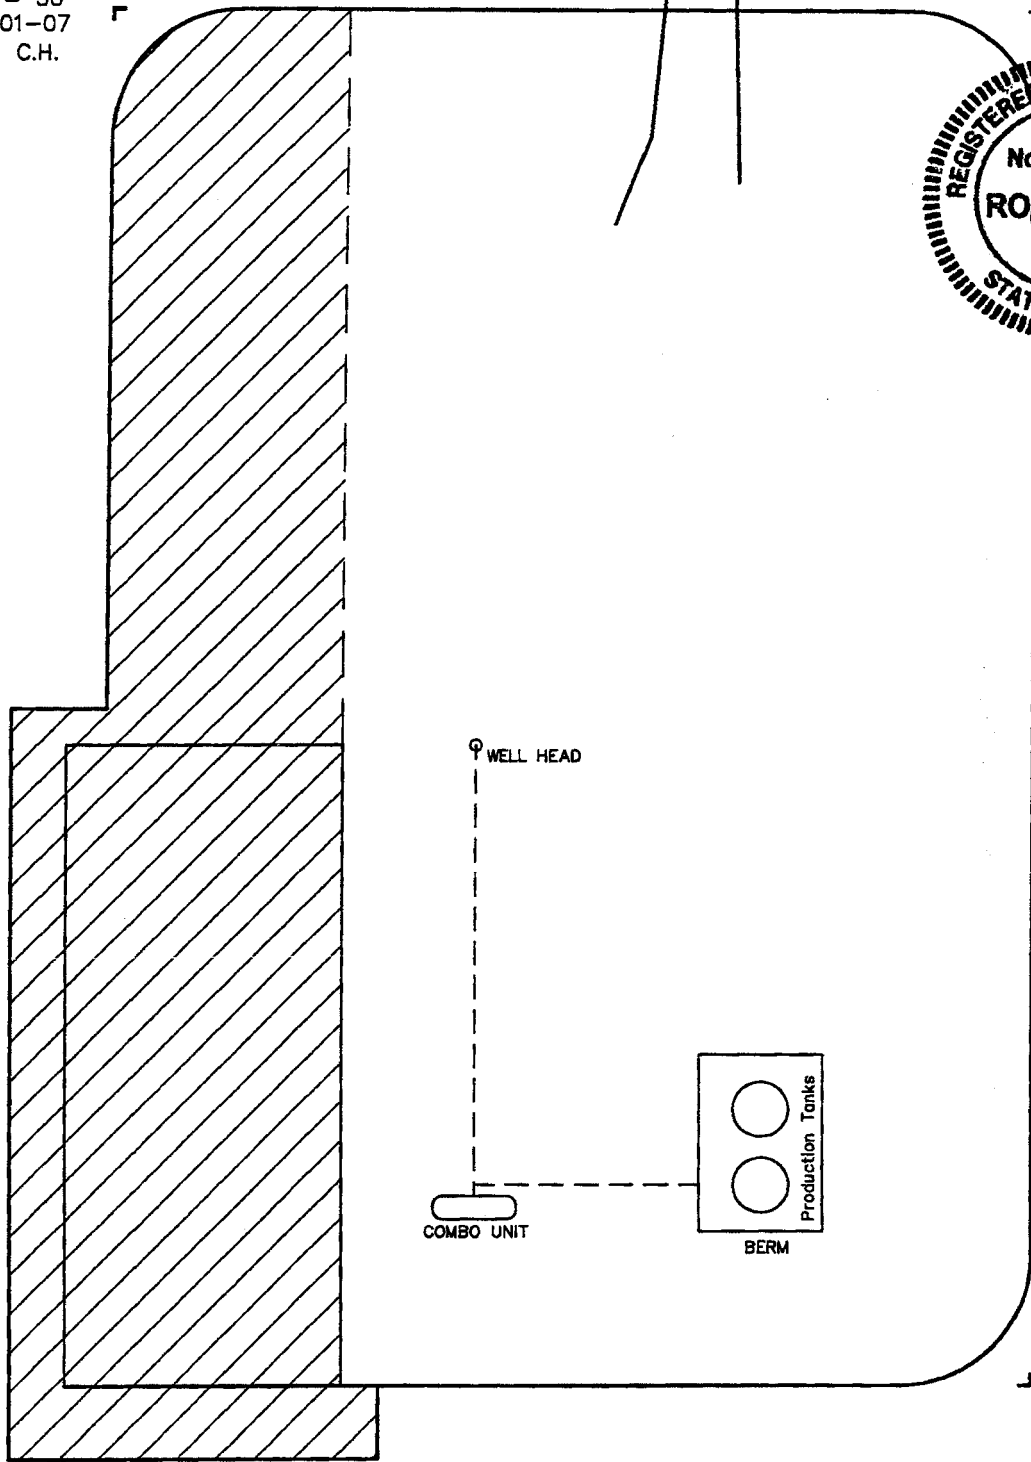

RE-HABED AREA

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

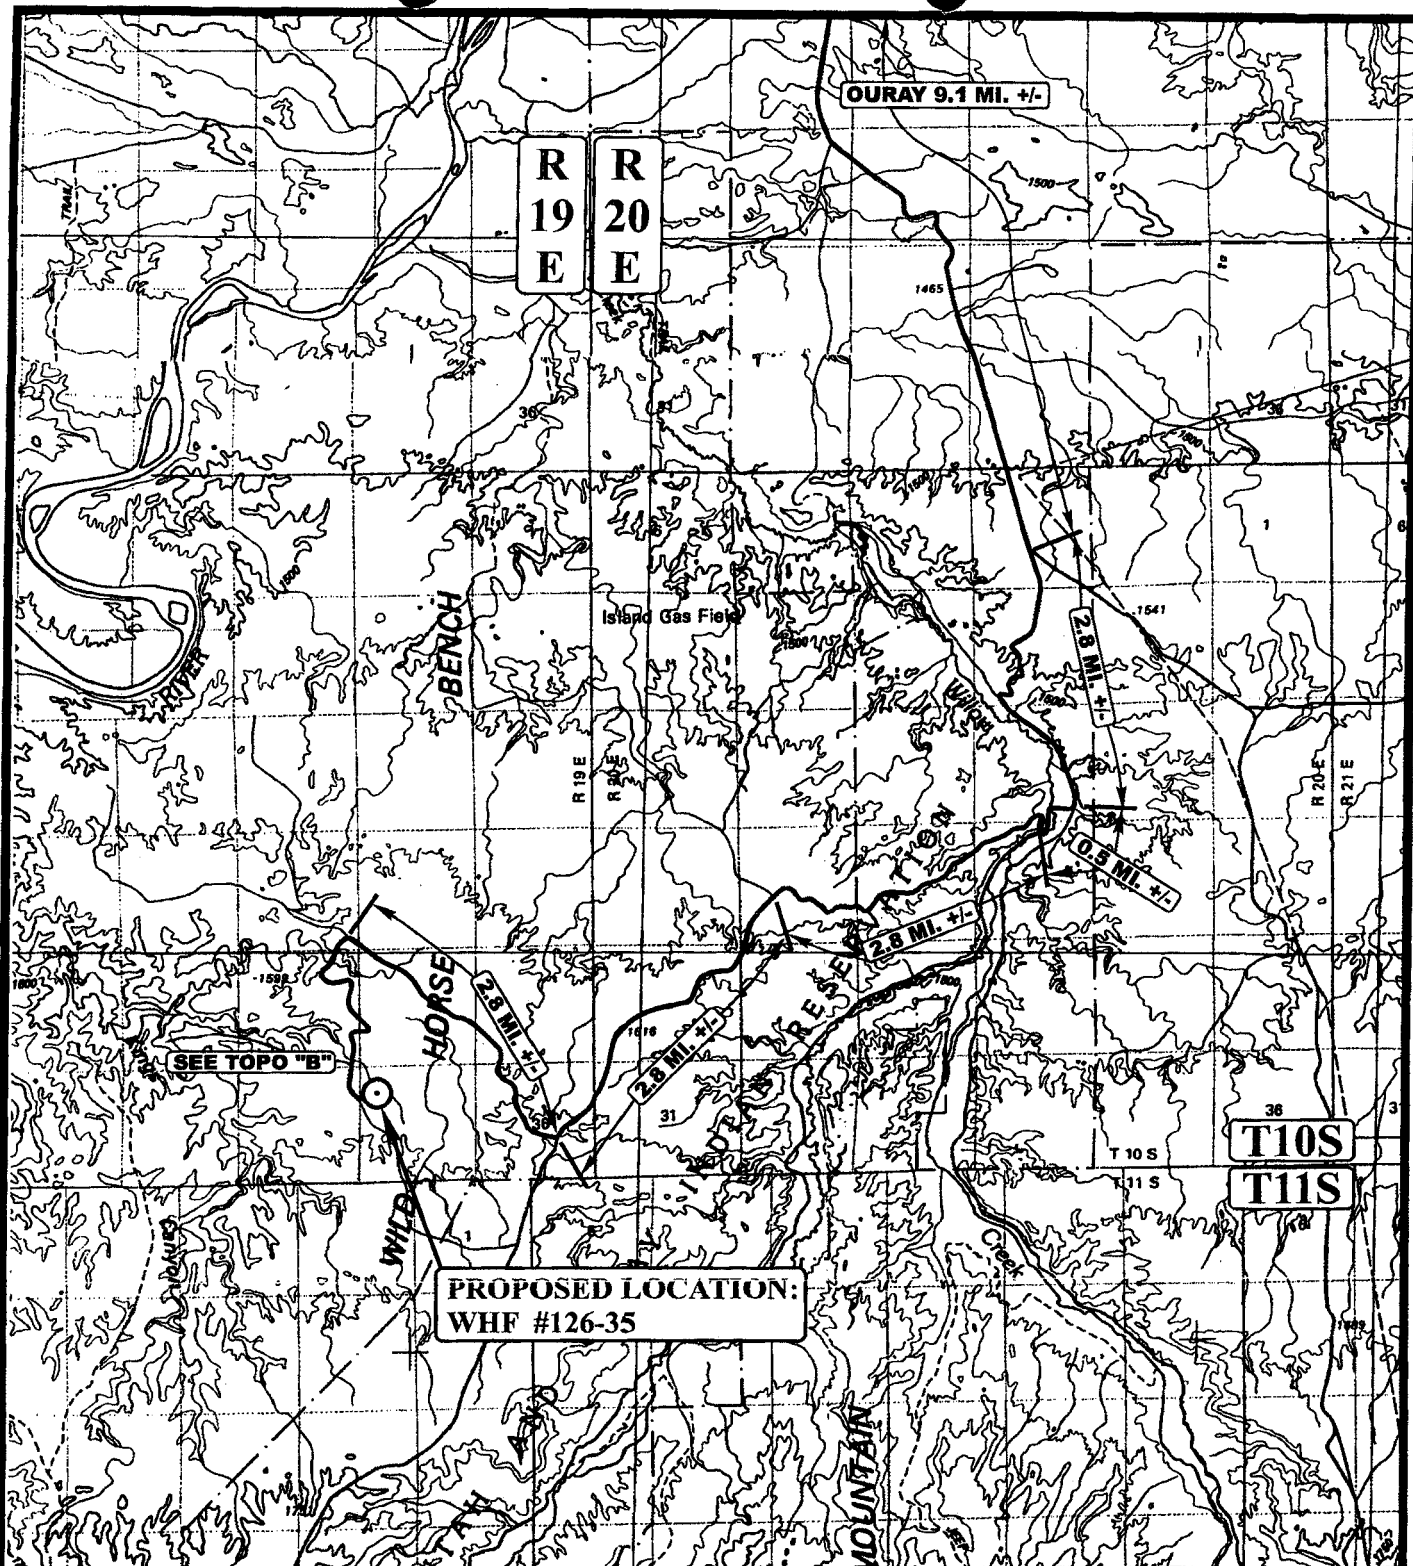


**LEGEND:**




## EOG RESOURCES, INC.



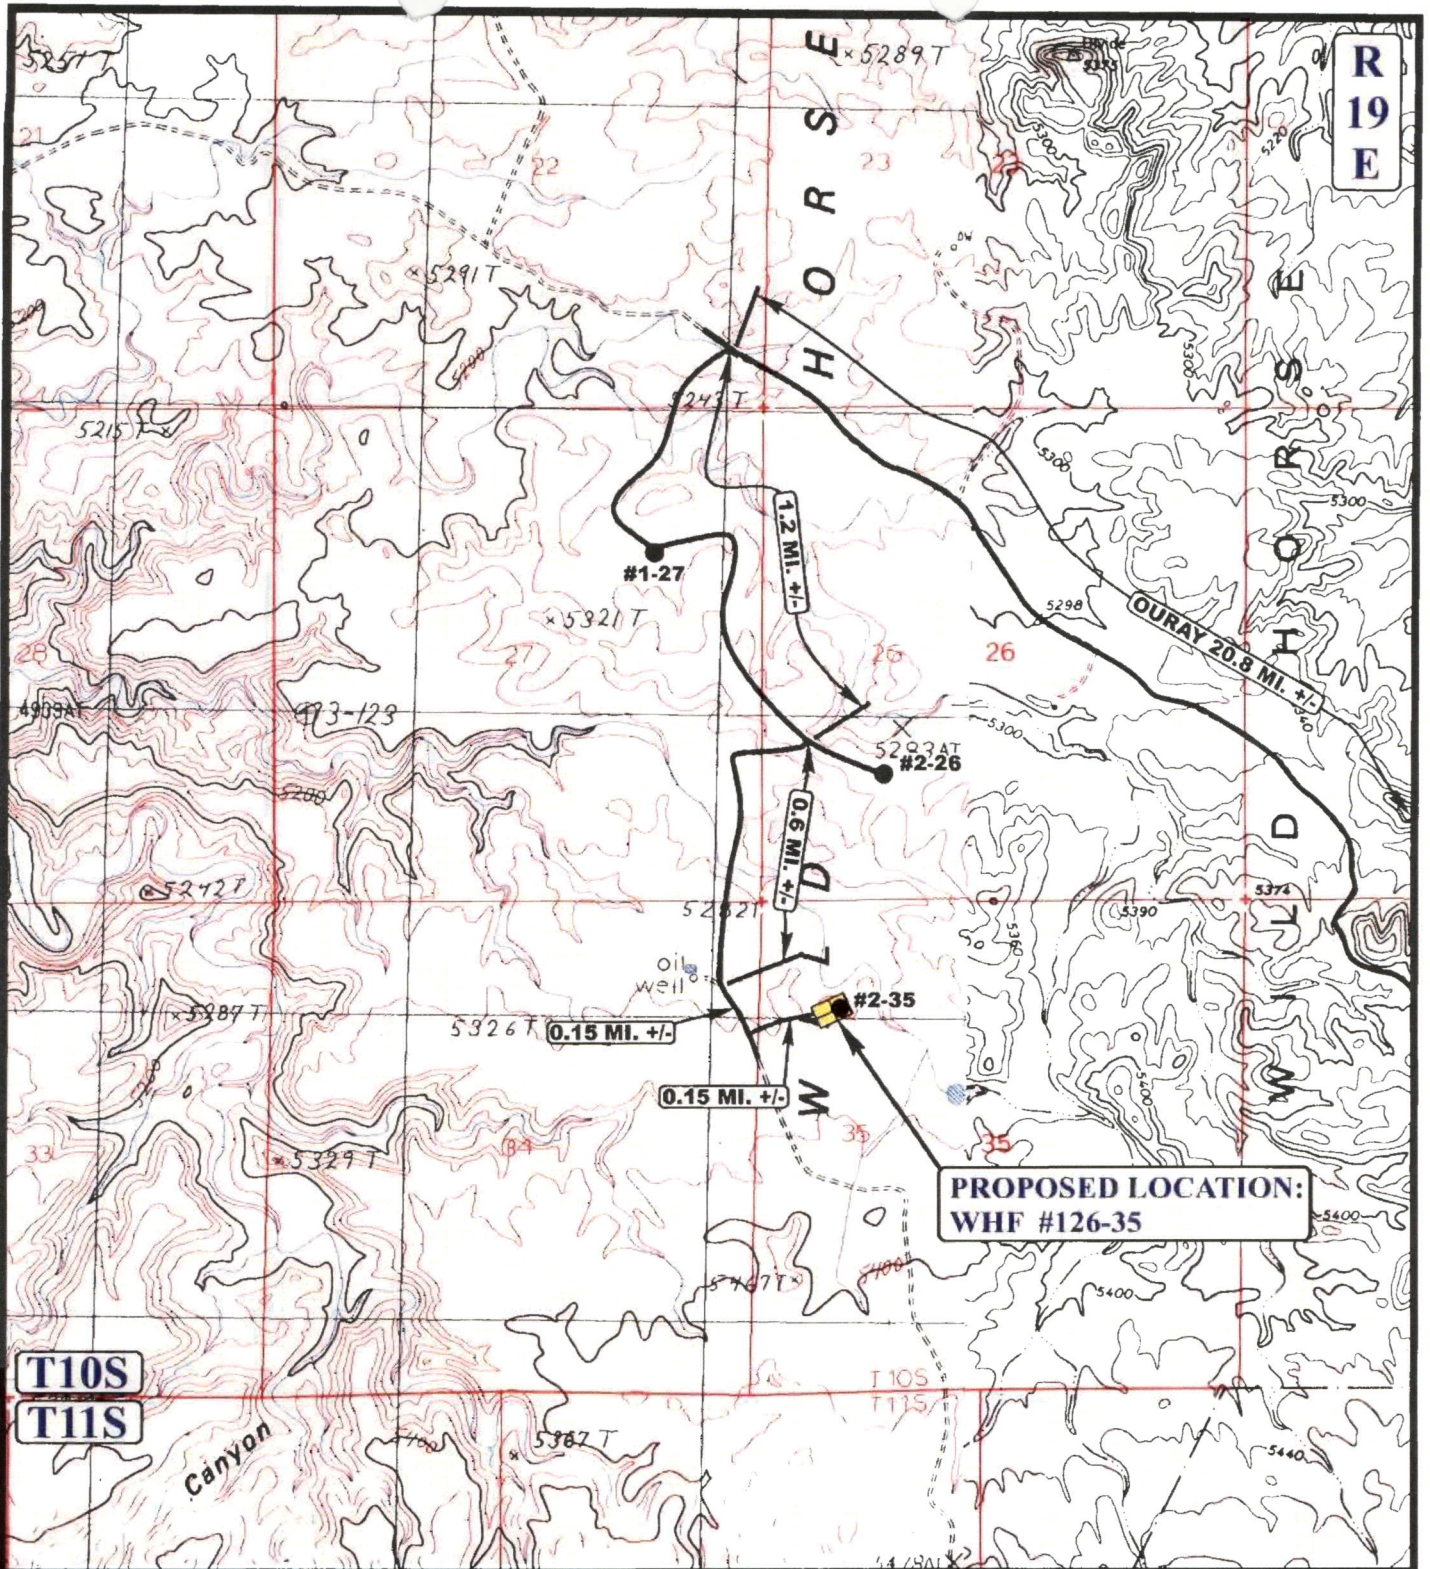

**T10S**  
**T11S**

Canyon

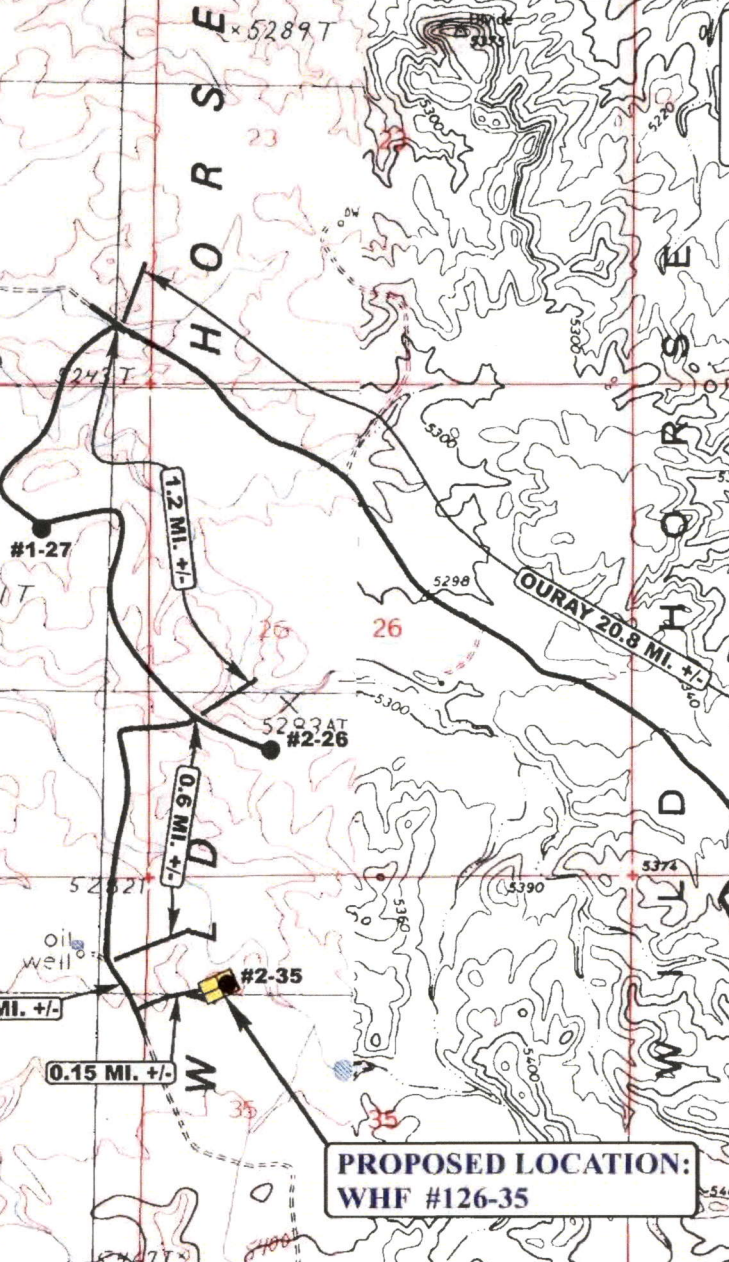

**LEGEND:**

**EXISTING ROAD**

**N**

**EOG RESOURCES, INC.**

**WHF #126-35**

**SECTION 35, T10S, R19E, S.L.B.&M.**

**1186' FNL 795' FWL**

**TOPOGRAPHIC**  
**MAP**

**05 29 07**  
**MONTH DAY YEAR**

**SCALE: 1" = 2000'**

**DRAWN BY: A.A.**


**REVISED: 00-00-00**

**B**  
**TOPO**

**U**  
**E**  
**S**

**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813



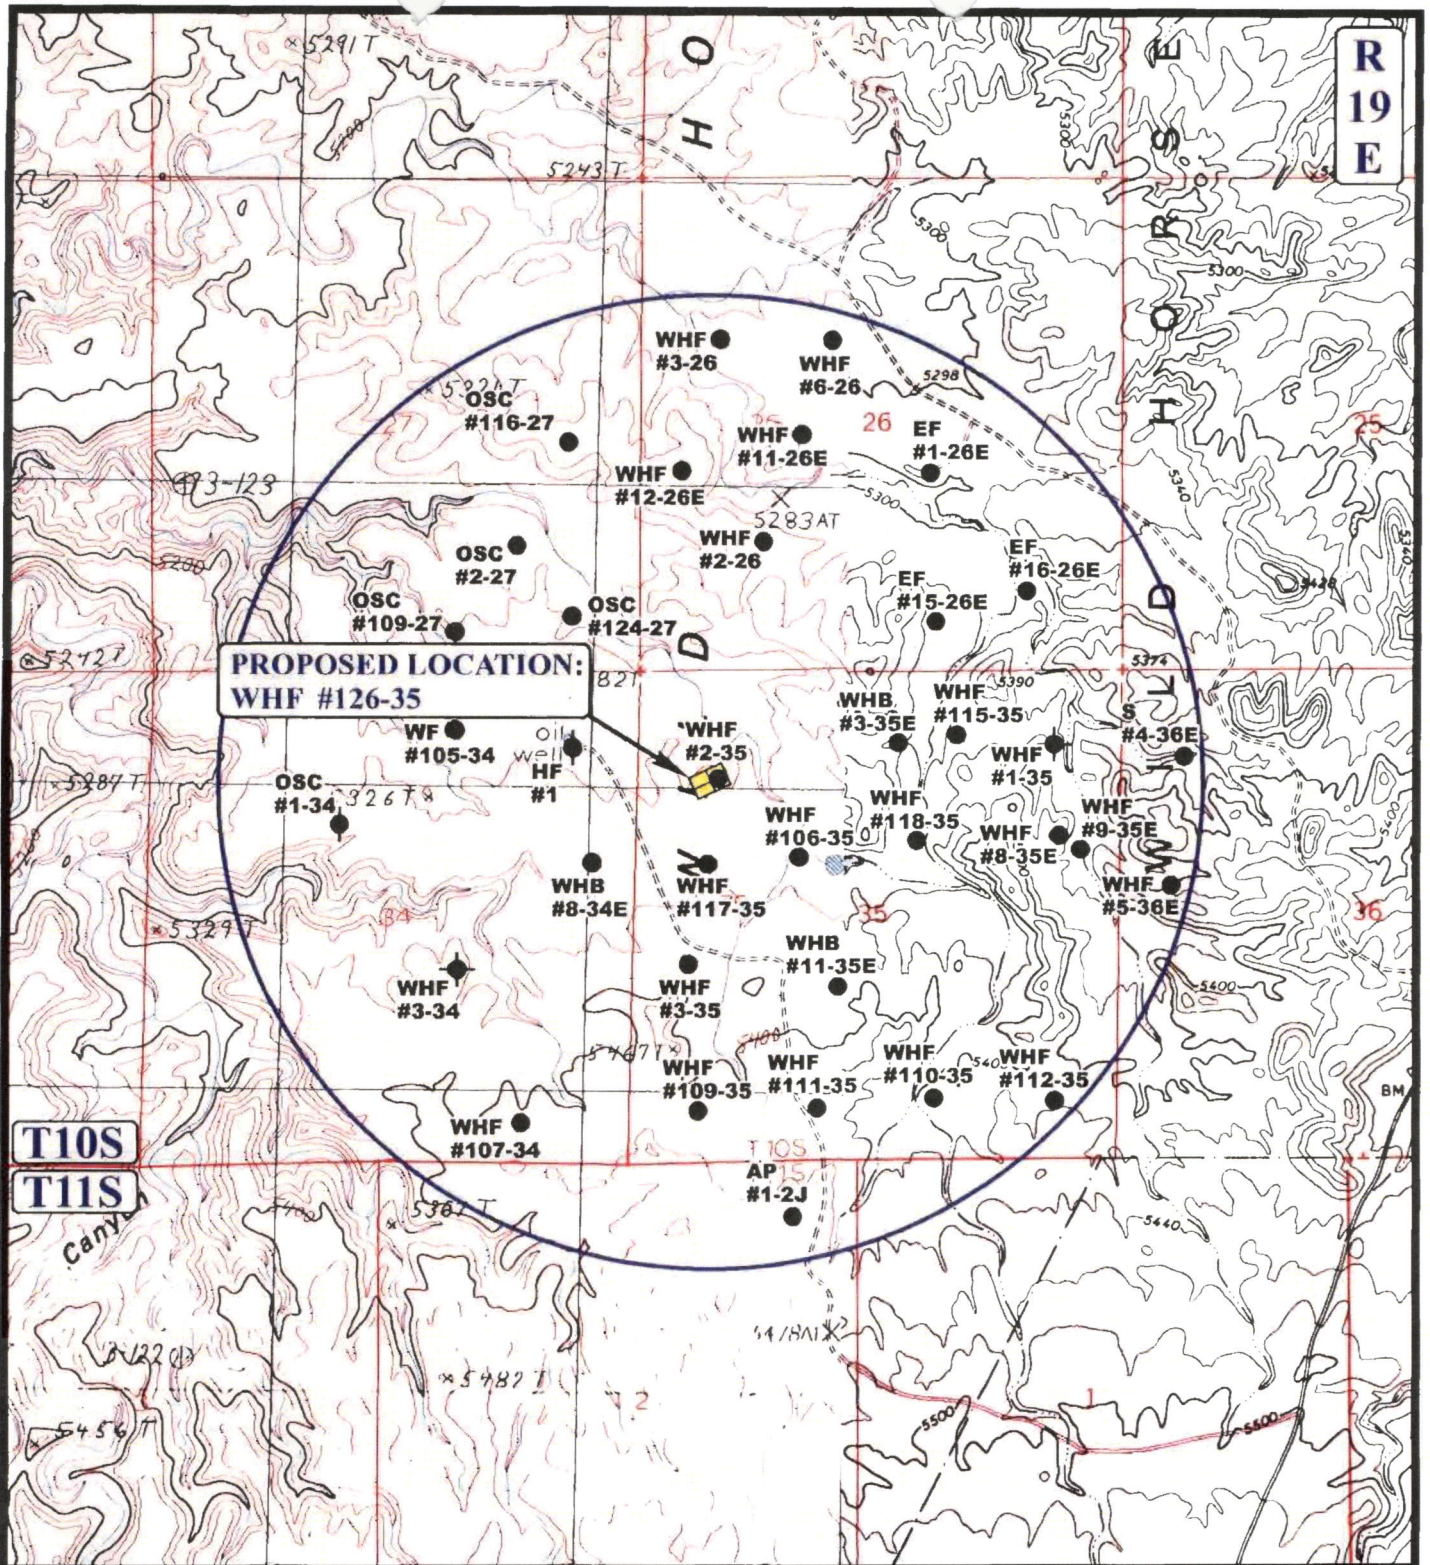

**PROPOSED LOCATION:**  
**WHF #126-35**

**T10S**

**T11S**

**LEGEND:**

- |                   |                         |
|-------------------|-------------------------|
| ○ DISPOSAL WELLS  | ○ WATER WELLS           |
| ● PRODUCING WELLS | ● ABANDONED WELLS       |
| ● SHUT IN WELLS   | ● TEMPORARILY ABANDONED |

**EOG RESOURCES, INC.**

**WHF #126-35**  
**SECTION 35, T10S, R19E, S.L.B.&M.**  
**1186' FNL 795' FWL**



**Uintah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC**  
**MAP**

**05 29 07**  
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: A.A. REVISED: 00-00-00



**WORKSHEET**  
**APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 08/07/2008

API NO. ASSIGNED: 43-047-40308

WELL NAME: WH FED 126-35

OPERATOR: EOG RESOURCES, INC. ( N9550 )

PHONE NUMBER: 303-824-5526

CONTACT: MARY MAESTAS

PROPOSED LOCATION:

NWNW 35 100S 190E

SURFACE: 1186 FNL 0795 FWL

BOTTOM: 1186 FNL 0795 FWL

COUNTY: Uintah

LATITUDE: 39.90753 LONGITUDE: -109.7552

UTM SURF EASTINGS: 606401 NORTHINGS: 4418026

FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /

Tech Review

Initials

Date

Engineering

DKD

9/11/08

Geology

Surface

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU3405

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat  
☒ Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. NM2308 )  
☒ Potash (Y/N)  
☒ Oil Shale 190-5 (B) or 190-3 or 190-13  
☒ Water Permit  
(No. 49-225 )  
☒ RDCC Review (Y/N)  
(Date: )  
☒ Fee Surf Agreement (Y/N)  
☒ Intent to Commingle (Y/N)  
(Wasatch Mesaverde)

LOCATION AND SITING:


\_\_\_ R649-2-3.  
Unit: \_\_\_\_\_  
\_\_\_ R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells  
☒ R649-3-3. Exception  
\_\_\_ Drilling Unit  
Board Cause No: \_\_\_\_\_  
Eff Date: \_\_\_\_\_  
Siting: \_\_\_\_\_  
\_\_\_ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

4. THIS WELL SHALL NOT PRODUCE GAS FROM THE WASATCH FORMATION  
UNLESS THE WASATCH ZONE IN THE WHITE HORSE FEDERAL Z-35 IS  
PLUGGED AND INCAPABLE OF PRODUCTION.



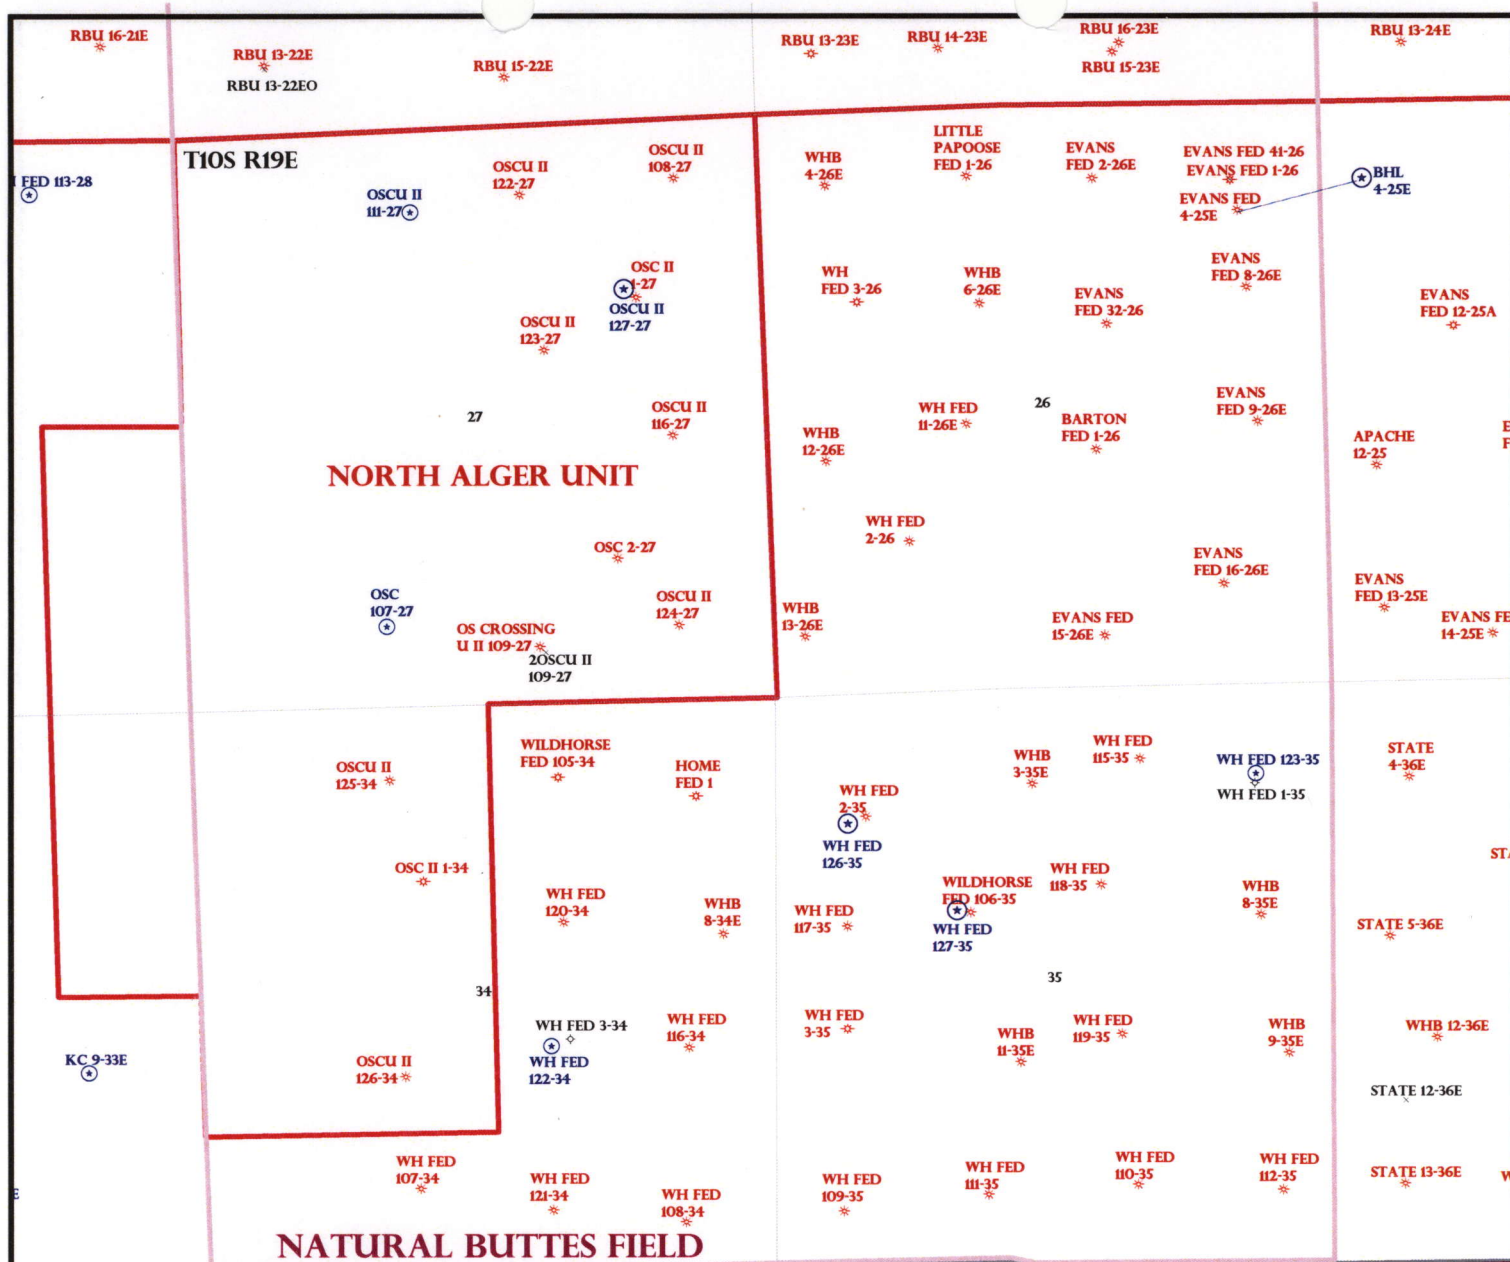

L 3-1

T10S R19E

AP 3-2J

BHL 2-2J

AP 2-2J

AP 1-2J

WH DIVIDE 13-01

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 35 T.10S R. 19E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-3 / EXCEPTION LOCATION

**Field Status**

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

**Unit Status**

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED



PREPARED BY: DIANA MASON  
DATE: 11-AUGUST-2008



**EOG Resources, Inc.**  
600 Seventeenth Street  
Suite 1000N  
Denver, CO 80202  
Main: 303-572-9000  
Fax: 303-824-5400

October 30, 2008

State of Utah  
Division of Oil, Gas and Mining  
P.O. Box 145801  
Salt Lake City, Utah 84114-5801

Attention: Ms. Diana Whitney

RE: Request for Exception to Location  
and Siting of Wells  
**Wild Horse Federal 126-35**  
NW/4NW/4 of Sec. 35-10S-19E, SLM  
Uintah County, Utah  
Old Squaw's Crossing Prospect  
1560-G06, 0055824-000

Ladies and Gentlemen:

EOG Resources, Inc. ("EOG") proposes and respectfully requests permission to drill the Wild Horse Federal 126-35, a 10,160' Wasatch/Mesaverde test well, at a location 1186' FNL, 795' FWL (NW/4NW/4) of Section 35, Township 10 South, Range 19 East, SLM, Uintah County, Utah, which is not a location at which a well could be drilled in compliance with General Rule R649-3-2.

The subject Wild Horse Federal 126-35 well is a twin to the existing Wild Horse Federal 2-35 well. The decision to twin the existing location was to avoid additional surface disturbance in this area. Therefore, EOG is requesting this exception location.

Enclosed herewith is a copy of the survey plat for the proposed well and another plat labeled Exhibit "A" which depicts the outlines of the 40-acre drilling units established in General Rule R649-3-2, the location at which EOG requests permission to drill the proposed Wild Horse Federal 126-35, and the Wasatch/Mesaverde formation well(s) which have been drilled within the area.

XTO Energy Inc. ("XTO") is the only other owner of operating rights within a 460' radius of the proposed Wild Horse Federal 126-35 well (see Exhibit "B" enclosed). A letter dated October 10, 2008, in which XTO has evidenced their written consent to EOG's proposed drilling of the Wild Horse Federal 126-35 well at the requested exception location is also enclosed.

**RECEIVED**  
**NOV 03 2008**  
**DIV. OF OIL, GAS & MINING**

Division of Oil, Gas and Mining  
October 30, 2008  
Page 2 of 2

EOG respectfully requests the Utah Division of Oil, Gas and Mining review and grant administrative approval of this application for an exception well location and permission to drill the proposed Wasatch/Mesaverde formation well described herein at its earliest opportunity.

If you have any questions or need any additional information, please do not hesitate to contact the undersigned.

Yours very truly,

**EOG RESOURCES, INC.**

A handwritten signature in black ink, appearing to read "Debbie Spears", written in a cursive style.

Debbie Spears  
Land Associate

/das

Enclosures

M:\das\exception\location\WHF126-35.doc

cc: Kaylene Gardner (with copies of enclosures)  
Denver Well File (with copies of enclosures)

T10S, R19E, S.L.B.&M.

1956 Brass Cap,  
Pile of Stones,  
0.8' High, E-W  
Fenceline

S89°46'00"W - 2622.75' (Meas.)

S89°45'01"W - 2621.37' (Meas.)

1956 Brass Cap,  
0.8' High, E-W  
Fenceline, Pile  
of Stones

1956 Brass Cap,  
1.2' High, E-W  
Fenceline, Pile  
of Stones

WILD HORSE FEDERAL #126-35  
Elev. Ungraded Ground = 5309'

1956 Brass Cap,  
1.0' High, Pile of  
Stones

1956 Brass Cap,  
1.5' High, Large  
Pile of Stones,  
Drainage ELY

1956 Brass Cap,  
0.8' High, Pile of  
Stones, Steel Post

1956 Brass Cap,  
Pile of Stones

T10S

T11S

S89°15'10"W - 2653.38' (Meas.)

N89°55'31"W - 2631.71' (Meas.)

2" Brass Cap in  
Pile of Stones

Sec. 2

Sec. 1

# LEGEND:

└ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 39°54'27.35" (39.907597)

LONGITUDE = 109°45'21.28" (109.755911)

(NAD 27)

LATITUDE = 39°54'27.48" (39.907633)

LONGITUDE = 109°45'18.78" (109.755217)

## EOG RESOURCES, INC.


Well location, WILD HORSE FEDERAL #126-35,  
located as shown in the NW 1/4 NW 1/4 of  
Section 35, T10S, R19E, S.L.B.&M., Uintah  
County, Utah.

## BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION  
20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN.  
NW QUADRANGLE, UTAH, UTAH COUNTY 7.5 MINUTE QUAD.  
(TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES  
DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID  
ELEVATION IS MARKED AS BEING 5251 FEET.


## BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

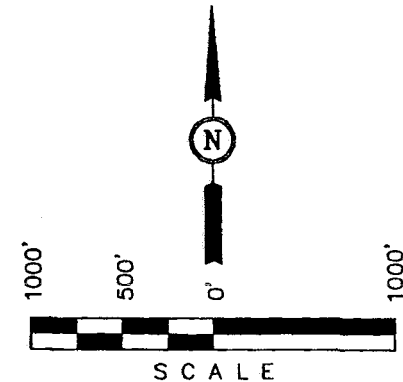

## CERTIFICATE


THIS IS TO CERTIFY THAT THE ABOVE WAS OBTAINED FROM  
FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY  
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE  
BEST OF MY KNOWLEDGE AND BELIEF.




UINTAH ENGINEERING & LAND SURVEYING  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-23-07	DATE DRAWN: 05-30-07
PARTY A.F. R.M. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

R 19 E

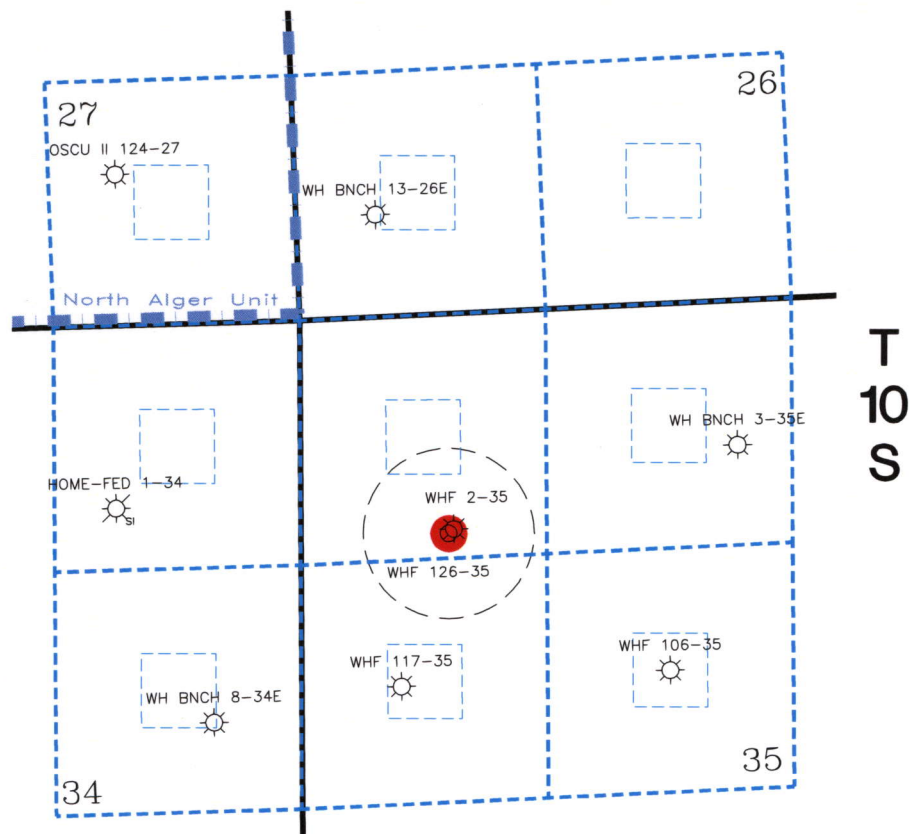

- Oil or Gas Well Location Pattern pursuant to Utah Administrative Code Rule R 649-3-2
- Legal window within which an oil and gas well could be drilled in compliance with R 649-3-2.



Locations at which oil or gas wells have been drilled

Location at which applicant requests permission to drill the proposed Wild Horse Federal 126-35 Well:  
1186' FNL, 795' FWL (NWNW) of Sec. 35, T10S, R19E

Scale: 1"=1000'

0 1/4 1/2 Mile



Exhibit "A"



Denver Division


Application for  
Exception Well Location  
**Wild Horse Federal 126-35 Well**

UINTAH COUNTY, UTAH


Scale: 1"=1000'	D:\utah\exception_plats\exc10s19e-35.dwg exc_A_40	Author gt	Oct 08, 2008 - 3:21pm
--------------------	--	--------------	--------------------------



R 19 E

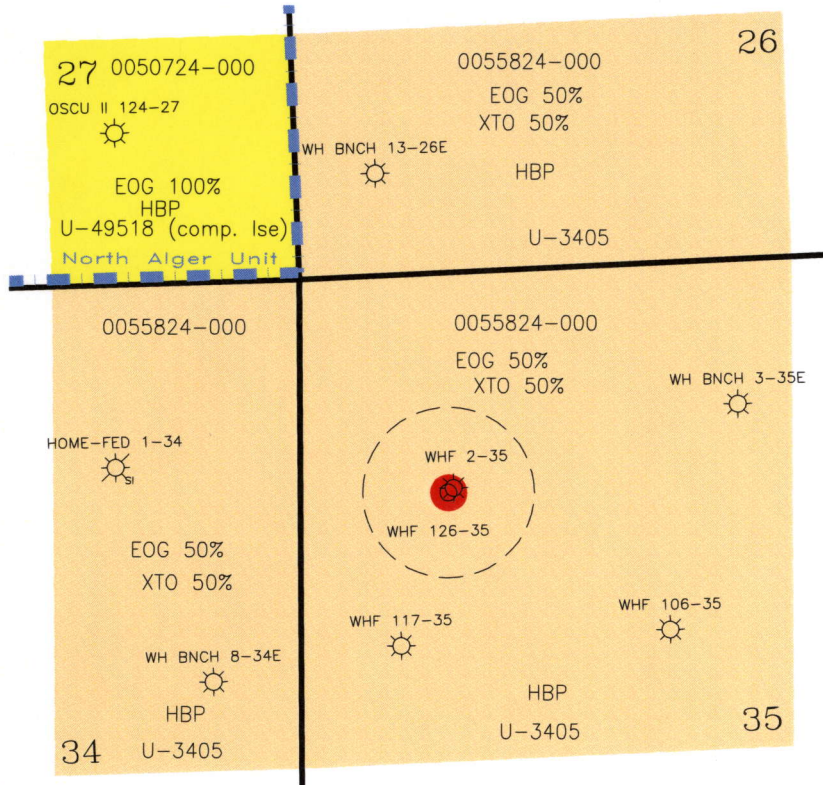


Working Interest (Mesaverde Fm)



● Location at which applicant requests permission to drill the proposed Wild Horse Federal 126-35 Well: 1186' FNL, 795' FWL (NWNW) of Sec. 35, T10S, R19E

**Exhibit "B"**



Denver Division

Application for  
Exception Well Location  
**Wild Horse Federal 126-35 Well**

UINTAH COUNTY, UTAH

Scale: 1"=1000'

D:\utah\exception\_plats\  
exc10s19e-35.dwg  
exc\_B\_40

Author

Oct 09, 2008 -  
11:16am



EOG Resources, Inc.  
600 Seventeenth Street  
Suite 1000N  
Denver, CO 80202  
Main: 303-572-9000  
Fax: 303-824-5400

October 10, 2008

XTO Energy  
810 Houston Street  
Fort Worth, Texas 76012-6298

Attention: Mr. Mick Dow

RE: Request for Consent to  
Exception Well Location  
**Wild Horse Federal 126-35**  
NW/4NW/4 of Sec. 35-10S-19E, SLM  
Uintah County, Utah  
Old Squaws Crossing Prospect  
1560-G06, 0055824-000

Gentlemen:

EOG Resources, Inc. ("EOG") has staked and proposes to drill the Wild Horse Federal 126-35, a 10,160' Wasatch/Mesaverde formation test well, at a location 1,186' FNL, 795' FWL (NW/4NW/4) of Section 35, Township 10 South, Range 19 East, SLM, Uintah County, Utah (see enclosed copy of plat).

The State of Utah Board of Oil, Gas and Mining established General Rule R649-3-2, which requires a well be located in the center of a 40-acre quarter-quarter section with a tolerance of 200' in any direction (a window 400' square) and not less than 920' from any other well drilling to, completed in and/or capable of producing from same pool.

Inasmuch as the location of the proposed Wild Horse Federal 126-35 well is not in compliance with this general rule, EOG will request the State of Utah Division of Oil, Gas and Mining's administrative approval of such location as an exception location in accordance with General Rule R649-3-3. Such Rule requires EOG to submit written consent from all owners within a 460' radius of the proposed well.

Therefore, if you have no objections to EOG's drilling this proposed Wasatch/Mesaverde test well at the above-described location, EOG respectfully requests you so indicate such written consent to same by having this letter dated and executed in the spaces provided below and returning one (1) originally executed copy to my attention at the letterhead address at your very earliest opportunity.

Thank you for your favorable consideration of this request. If you have any questions, please don't hesitate to call the undersigned at (303) 824-5430.

Sincerely,

**EOG RESOURCES, INC.**



Debbie Spears  
Land Associate

/das  
exloc\whf126-35

On this 23rd day of October, 2008, the undersigned hereby grants its written consent to EOG Resources, Inc.'s drilling the proposed Wasatch/Mesaverde test, the Wild Horse Federal 126-35, at a location 1,186' FNL, 795' FWL (NW/4NW/4) of Section 35, Township 10 South, Range 19 East, SLM, Uintah County, Utah, which location is an exception to State of Utah Board of Oil, Gas and Mining's General Rule R649-3-2.

**XTO ENERGY**

By: 

Title: Mick Dow - Associate Landman



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

November 18, 2008

EOG Resources, Inc  
1060 East Highway 40  
Vernal, UT 84078

Re: Wild Horse Federal 126-35 Well, 1186' FNL, 795' FWL, NW NW, Sec. 35, T. 10 South,  
R. 19 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

Administrative approval for commingling the production from the Wasatch formation and the Mesaverde formation in this well is hereby granted. Appropriate information has been submitted to DOGM in accordance with R649-3-22. No written objections from owners were received by DOGM.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-40308.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal Office



Operator: EOG Resources, Inc  
Well Name & Number Wild Horse Federal 126-35  
API Number: 43-047-40308  
Lease: UTU3405

Location: NW NW                      Sec. 35                      T. 10 South                      R. 19 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office      (801) 733-0983 home


3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

6. This well shall not produce gas from the Wasatch Formation unless the Wasatch zone in the White Horse Federal 2-35 is plugged and incapable of production.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>			
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU3405			
<b>1. TYPE OF WELL</b> Gas Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>			
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.		<b>7. UNIT or CA AGREEMENT NAME:</b>			
<b>3. ADDRESS OF OPERATOR:</b> 1060 East Highway 40 , Vernal, UT, 84078		<b>8. WELL NAME and NUMBER:</b> WH FED 126-35			
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1186 FNL 0795 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWNW Section: 35 Township: 10.0S Range: 19.0E Meridian: S		<b>9. API NUMBER:</b> 43047403080000			
<b>PHONE NUMBER:</b> 435 781-9111 Ext		<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES			
<b>COUNTY:</b> UTAH		<b>STATE:</b> UTAH			
<b>11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA</b>					
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>				
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 11/4/2009  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER         </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input checked="" type="checkbox"/> APD EXTENSION          OTHER: _____       </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____			
<b>12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.</b> EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.					
<b>Approved by the Utah Division of Oil, Gas and Mining</b>					
<b>Date:</b> <u>November 05, 2009</u>					
<b>By:</b> 					
<b>NAME (PLEASE PRINT)</b> Mickenzie Gates	<b>PHONE NUMBER</b> 435 781-9145	<b>TITLE</b> Operations Clerk			
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/4/2009				



## The Utah Division of Oil, Gas, and Mining

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

### Request for Permit Extension Validation Well Number 43047403080000

**API:** 43047403080000

**Well Name:** WH FED 126-35

**Location:** 1186 FNL 0795 FWL QTR NWNW SEC 35 TWNP 100S RNG 190E MER S

**Company Permit Issued to:** EOG RESOURCES, INC.

**Date Original Permit Issued:** 11/18/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Mickenzie Gates

**Date:** 11/4/2009

**Title:** Operations Clerk **Representing:** EOG RESOURCES, INC.

**Date:** November 05, 2009

**By:** 

**RECEIVED** November 04, 2009

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU3405
<b>1. TYPE OF WELL</b> Gas Well		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.		<b>7. UNIT or CA AGREEMENT NAME:</b>
<b>3. ADDRESS OF OPERATOR:</b> 1060 East Highway 40, Vernal, UT, 84078		<b>8. WELL NAME and NUMBER:</b> WH FED 126-35
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1186 FNL 0795 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWNW Section: 35 Township: 10.0S Range: 19.0E Meridian: S		<b>9. API NUMBER:</b> 43047403080000
<b>PHONE NUMBER:</b> 435 781-9111 Ext		<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>COUNTY:</b> UINTAH		<b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 10/19/2010  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> <b>APD EXTENSION</b> OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
 EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: October 25, 2010

By:

<b>NAME (PLEASE PRINT)</b> Michelle Robles	<b>PHONE NUMBER</b> 307 276-4842	<b>TITLE</b> Regulatory Assistant
<b>SIGNATURE</b> N/A		<b>DATE</b> 10/19/2010





## The Utah Division of Oil, Gas, and Mining

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

### Request for Permit Extension Validation Well Number 43047403080000

**API:** 43047403080000

**Well Name:** WH FED 126-35

**Location:** 1186 FNL 0795 FWL QTR NWNW SEC 35 TWNP 100S RNG 190E MER S

**Company Permit Issued to:** EOG RESOURCES, INC.

**Date Original Permit Issued:** 11/18/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Michelle Robles

**Date:** 10/19/2010

**Title:** Regulatory Assistant **Representing:** EOG RESOURCES, INC.

**Date:** October 25, 2010

**By:** 

**RECEIVED** October 19, 2010

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>			
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU3405			
		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>			
		<b>7. UNIT or CA AGREEMENT NAME:</b>			
<b>1. TYPE OF WELL</b> Gas Well		<b>8. WELL NAME and NUMBER:</b> WH FED 126-35			
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.		<b>9. API NUMBER:</b> 43047403080000			
<b>3. ADDRESS OF OPERATOR:</b> 600 17th Street, Suite 1000 N, Denver, CO, 80202		<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES			
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1186 FNL 0795 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWNW Section: 35 Township: 10.0S Range: 19.0E Meridian: S		<b>COUNTY:</b> UINTAH			
		<b>STATE:</b> UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>				
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 10/4/2011  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION           </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER           </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input checked="" type="checkbox"/> APD EXTENSION            OTHER: <span style="border: 1px solid black; display: inline-block; width: 100px; height: 1.2em; vertical-align: middle;"></span> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <span style="border: 1px solid black; display: inline-block; width: 100px; height: 1.2em; vertical-align: middle;"></span>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <span style="border: 1px solid black; display: inline-block; width: 100px; height: 1.2em; vertical-align: middle;"></span>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.					
<b>Approved by the Utah Division of Oil, Gas and Mining</b>  <b>Date:</b> 10/13/2011 <b>By:</b>					
<b>NAME (PLEASE PRINT)</b> Kaylene Gardner		<b>PHONE NUMBER</b> 435 781-9111			
<b>SIGNATURE</b> N/A		<b>TITLE</b> Regulatory Administrator			
		<b>DATE</b> 10/4/2011			



## The Utah Division of Oil, Gas, and Mining

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

### Request for Permit Extension Validation Well Number 43047403080000

**API:** 43047403080000

**Well Name:** WH FED 126-35

**Location:** 1186 FNL 0795 FWL QTR NWNW SEC 35 TWNP 100S RNG 190E MER S

**Company Permit Issued to:** EOG RESOURCES, INC.

**Date Original Permit Issued:** 11/18/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Signature:** Kaylene Gardner

**Date:** 10/4/2011

**Title:** Regulatory Administrator **Representing:** EOG RESOURCES, INC.

**RECEIVED** Oct. 04, 2011

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET (for state use only)**

ROUTING

CDW

**X - Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

**10/1/2011**

**FROM:** (Old Operator):  
 N9550- EOG Resources, Inc  
 1060 East Highway 40  
 Vernal, UT. 84078  
 Phone: 1 (435) 781-9145

**TO:** ( New Operator):  
 N3755- Koch Exploration Company, LLC  
 9777 Pyramid Court Suite 210  
 Englewood CO 80112  
 Phone: 1 (303) 325-2569

**CA No.**

**Unit:**

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
See List								

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 11/9/2011
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 11/9/2011
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 4/26/2012
- Is the new operator registered in the State of Utah: Business Number: 5078823-0161
- (R649-9-2)Waste Management Plan has been received on: Yes
- Inspections of LA PA state/fee well sites complete on: N/A
- Reports current for Production/Disposition & Sundries on: Yes
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 11/2/2011 BIA N/A
- Federal and Indian Units:**  
 The BLM or BIA has approved the successor of unit operator for wells listed on: N/A
- Federal and Indian Communization Agreements ("CA"):**  
 The BLM or BIA has approved the operator for all wells listed within a CA on: N/A
- Underground Injection Control ("UIC")** Division has approved UIC Form 5 Transfer of Authority to **Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 4/26/2012
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 4/26/2012
- Bond information entered in RBDMS on: N/A
- Fee/State wells attached to bond in RBDMS on: N/A
- Injection Projects to new operator in RBDMS on: N/A
- Receipt of Acceptance of Drilling Procedures for APD/New on: 4/26/2012

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: COB000296
- Indian well(s) covered by Bond Number: N/A
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number N/A
- The **FORMER** operator has requested a release of liability from their bond on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:** Koch accepted these "APD" wells on 4/3/2012

EOG Resources Inc (N9550) to  
Koch Exploration Company, LLC (N3755)  
Effective 10/1/2011

well_name	sec	twp	rng	api	Entity	lease	well	stat	unit	l_num
WH FED 113-28	28	100S	190E	4304737142		Federal	GW	APD		U-49519
WH FED 127-35	35	100S	190E	4304740307		Federal	GW	APD		UTU3405
WH FED 126-35	35	100S	190E	4304740308		Federal	GW	APD		UTU3405
WH FED 125-35	35	100S	190E	4304740329		Federal	GW	APD		UTU3405
WH FEDERAL 124-34	34	100S	190E	4304750083		Federal	GW	APD		UTU3405

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
Multiple Leases

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE – Other instructions on page 2.**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator  
EOG Resources, Inc

N9550

3a. Address  
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)  
435-781-9145

7. If Unit of CA/Agreement, Name and/or No.  
Natural Buttes

8. Well Name and No.  
Multiple Wells

9. API Well No.  
See Attached

10. Field and Pool or Exploratory Area  
Natural Buttes

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
See Attached

11. Country or Parish, State  
Utah, Utah

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Change of Operator
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list (the "Subject Wells") to Koch Exploration Company, LLC and will relinquish and transfer operatorship of all of the Subject Wells to Koch Exploration Company, LLC on October 1, 2011.

As of October 1, 2011, Koch Exploration Company, LLC will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Koch Exploration Company, LLC's Nationwide BLM Bond No. COB000296.

KOCH EXPLORATION COMPANY, LLC

N3755

By:  Date: September 1, 2011  
Brian J. Kissick  
Vice President

Address: 9777 Pyramid Court, Suite 210  
Englewood, Colorado 80112

Telephone Number: (303) 325-2561

RECEIVED

NOV 09 2011

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

J. Michael Schween

Title Agent and Attorney-in-Fact

Signature

Date 09/01/2011

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

APPROVED 4/26/2012



Division of Oil, Gas and Mining

Earlene Russell, Engineering Technician

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

**Request to Transfer Application or Permit to Drill**

(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	WILD HORSE FEDERAL 126-35
API number:	43-047-40308
Location:	Qtr-Qtr: NWNW Section: 35 Township: 10S Range: 19E
Company that filed original application:	EOG RESOURCES INC
Date original permit was issued:	
Company that permit was issued to:	

Check one	Desired Action:
<input checked="" type="checkbox"/>	Transfer pending (unapproved) Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Rm

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?		
If so, has the surface agreement been updated?		
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?		✓
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?		✓
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?		✓
Has the approved source of water for drilling changed?		✓
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?		✓
Is bonding still in place, which covers this proposed well? Bond No. COB000296	✓	

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) DOUGLAS HOWARD Title VP OPERATIONS  
Signature [Signature] Date 4/3/12  
Representing (company name) KOCH EXPLORATION COMPANY LLC

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
Multiple Leases  
6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE – Other instructions on page 2.**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator  
EOG Resources, Inc

3a. Address  
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)  
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
See Attached

7. If Unit of CA/Agreement, Name and/or No.  
Natural Buttes

8. Well Name and No.  
Multiple Wells

9. API Well No.  
See Attached

10. Field and Pool or Exploratory Area  
Natural Buttes

11. Country or Parish, State  
Utah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list (the "Subject Wells") to Koch Exploration Company, LLC and will relinquish and transfer operatorship of all of the Subject Wells to Koch Exploration Company, LLC on October 1, 2011.

As of October 1, 2011, Koch Exploration Company, LLC will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Koch Exploration Company, LLC's Nationwide BLM Bond No. COB000296.

KOCH EXPLORATION COMPANY, LLC

By: Brian J. Kissick Date: September 1, 2011  
Vice President

Address: 9777 Pyramid Court, Suite 210  
Englewood, Colorado 80112

Telephone Number: (303) 325-2561

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
J. Michael Schween

Title Agent and Attorney-in-Fact

Signature

Date 09/01/2011

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Assistant Field Manager  
Lands & Mineral Resources

Date

NOV 02 2011

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

VERNAL FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UDOGM

RECEIVED

NOV 04 2011

DIV. OF OIL, GAS & MINING





GARY R. HERBERT  
Governor

GREGORY S. BELL  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

March 4, 2013

Koch Exploration Company LLC  
950 17<sup>th</sup> Street, Ste. 1900  
Denver, CO 80202

Re: APD Rescinded – WH Fed 126-35, Sec. 35, T.10S, R.19E,  
Uintah County, Utah API No. 43-047-40308


Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on November 18, 2008. On November 5, 2009, October 25, 2010 and October 13, 2011 the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective March 4, 2013.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

  
Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Uintah

